


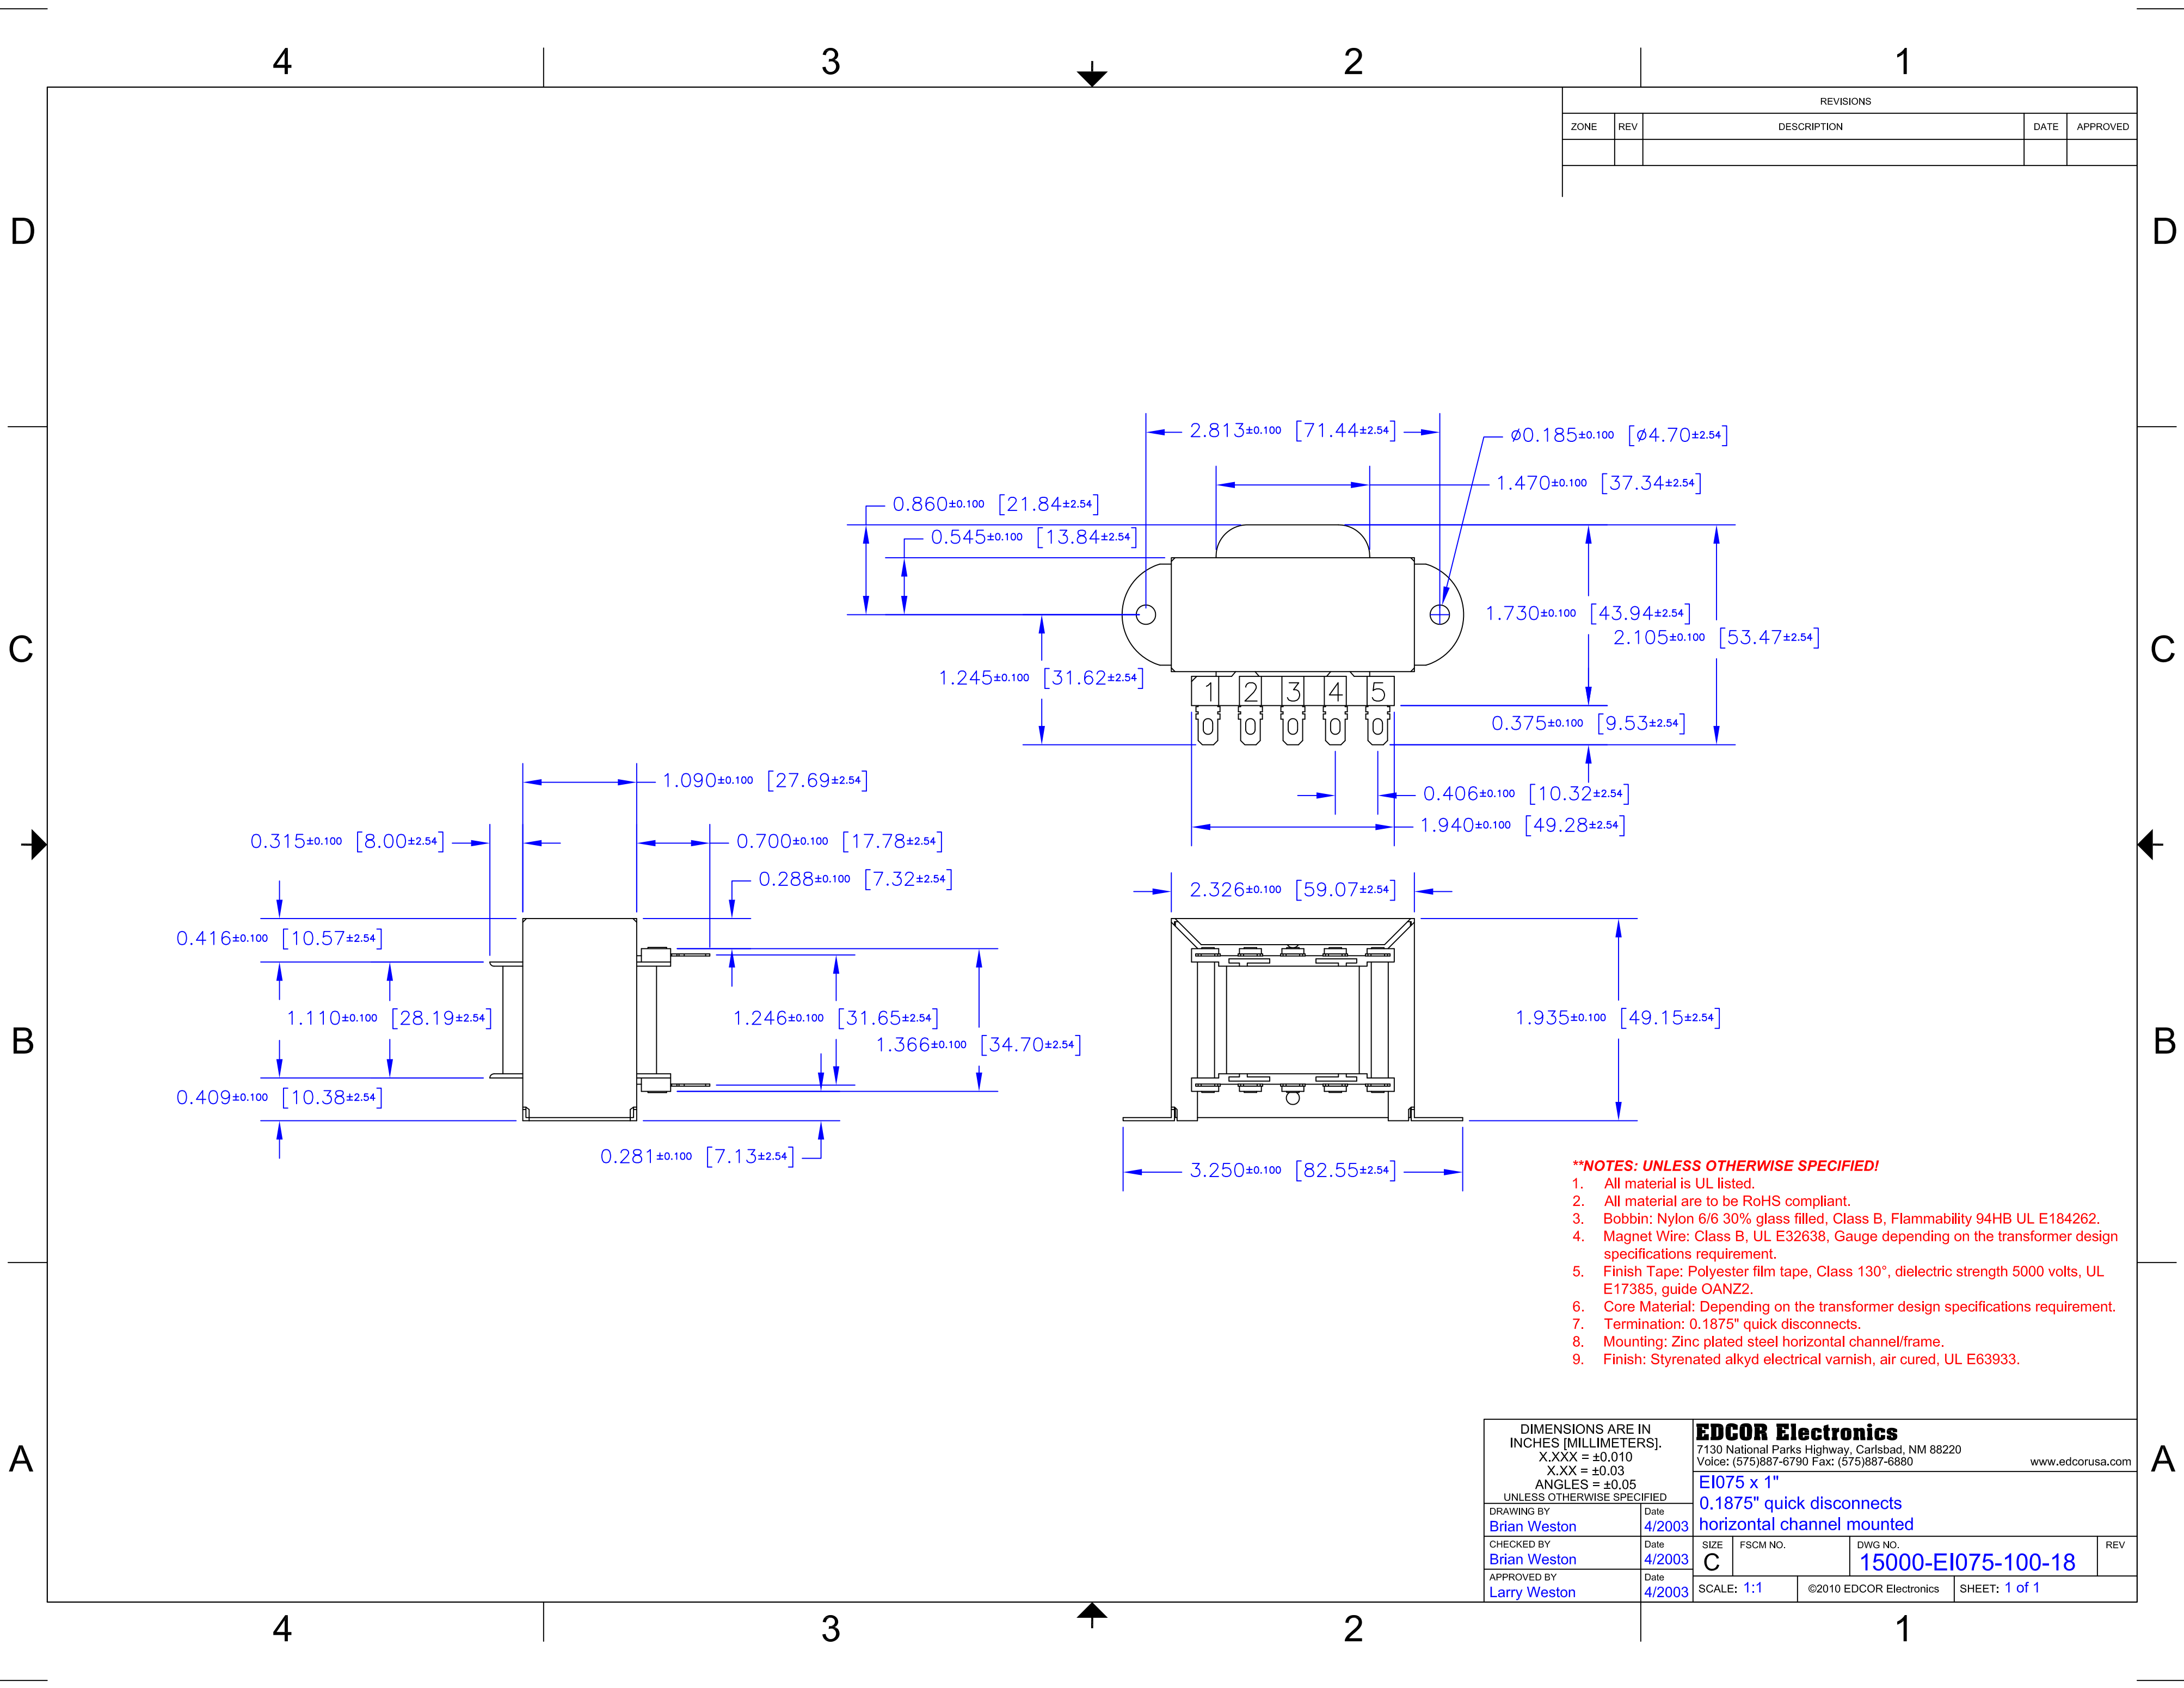

REVISIONS				
ZONE	REV	DESCRIPTION		DATE

- **NOTES: UNLESS OTHERWISE SPECIFIED!**
- 1. All material is UL listed.
 - 2. All material are to be RoHS compliant.
 - 3. Bobbin: Nylon 6/6 30% glass filled, Class B, Flammability 94HB UL E184262.
 - 4. Magnet Wire: Class B, UL E32638, Gauge depending on the transformer design specifications requirement.
 - 5. Finish Tape: Polyester film tape, Class 130°, dielectric strength 5000 volts, UL E17385, guide OANZ2.
 - 6. Core Material: Depending on the transformer design specifications requirement.
 - 7. Termination: 0.1875" quick disconnects.
 - 8. Mounting: Zinc plated steel horizontal channel/frame.
 - 9. Finish: Styrenated alkyd electrical varnish, air cured, UL E63933.

DIMENSIONS ARE IN INCHES [MILLIMETERS]. X.XXX = ±0.010 X.XX = ±0.03 ANGLES = ±0.05 UNLESS OTHERWISE SPECIFIED		EDCOR Electronics 7130 National Parks Highway, Carlsbad, NM 88220 Voice: (575)887-6790 Fax: (575)887-6880 www.edcorusa.com				
		EI075 x 1" 0.1875" quick disconnects horizontal channel mounted				
		DRAWING BY Brian Weston	Date 4/2003			
		CHECKED BY Brian Weston	Date 4/2003	SIZE C	FSCM NO.	DWG NO. 15000-EI075-100-18
APPROVED BY Larry Weston	Date 4/2003	SCALE: 1:1		©2010 EDCOR Electronics	SHEET: 1 of 1	