
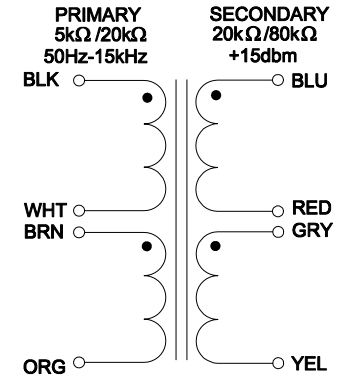


**DIMENSIONS:**

A	1.250" ±0.063
B	1.750" ±0.063
C	2.560" MAX.
D	1.320" ±0.063

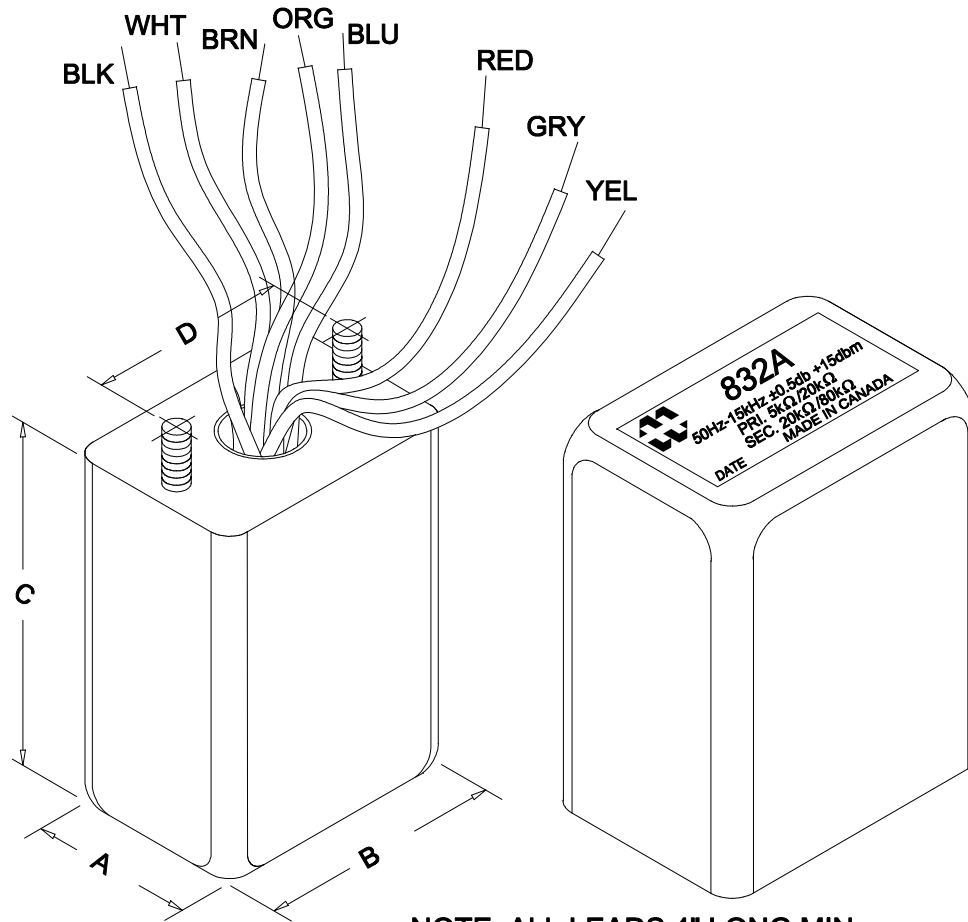

NOTE: ALL LEADS 4" LONG MIN.

**ELECTRICAL DATA:**

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
Iex	@ 12.58V, 300Hz, BLK - WHT	0.500mA	Max.
	@ 12.58V, 300Hz, BRN - ORG	0.500mA	Max.
Sec. N.L.V	@ 12.58V, 300Hz, BLK - WHT		
	BLU - RED =	25.16V	±2%
	@ 12.58V, 300Hz, BRN - ORG		
	GRY - YEL =	25.16V	±2%
DCR	@ 20°C, BLK - WHT =	348.0 Ω	±20%
	@ 20°C, BRN - ORG =	348.0 Ω	±20%
	@ 20°C, BLU - RED =	727.0 Ω	±20%
	@ 20°C, GRY - YEL =	727.0 Ω	±20%
HIPOT	PRIMARY - SECONDARY	750V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™		ELECTRONIC DIVISION	
0	RELEASED.	C.I. 03/20/17	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		PH # (519) 886-6181 FAX # (519) 886-9540	
1	ADDED MIN. LEAD LENGTH.	C.I. 03/22/17				
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: CHASSIS MOUNT	DWG. NO.
			DATE: 03/20/17	APP'D. BY:	AUDIO TRANSFORMER	832A
				DIMENSIONS: IN(X) MM( )		